


SPC Flooring Technical Data Sheet



Technical Data

Characteristic	Standard	Unit	Result
Straightness	EN ISO 24337	%	0.04mm/m
Squareness	EN ISO 24337	%	0.10mm
Overall Thickness	EN ISO 24346	mm	6
Wear Layer Thickness	EN ISO 24340	mm	0.3
Scratch Resistance	EN 16094		MSR B-2
Curling	EN 434	mm	<.04
Colour Fastness	EN ISO 105B02		Grade 6
Castor Chair Test	EN 425		Pass
Slip Resistance	EN 13893		Class DS
	DIN 51130		R9 to R10
Stain & Chemical Resistance	EN 423		No effect after 2 hours
Formaldehyde			E1- None detected
Fire Behaviour	EN 13501-1		Critical Radiant Flux ≥ 8Kw
Waterproof	ISO 4760:2022(E)		Impervious to moisture

Composition

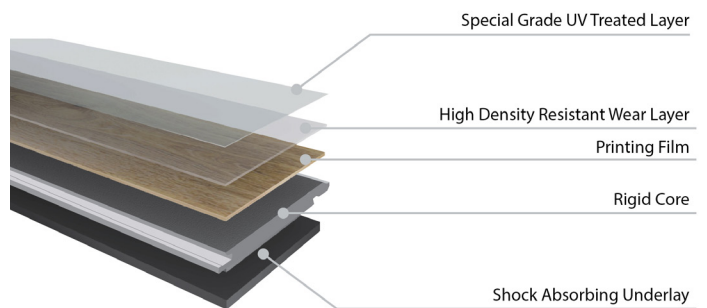

Size (mm) 180 x 1220 x 6 (W/L: 0.3mm)
 Planks per pack 8
 m2 per pack 1.76

Features & Benefits

- Anti-Bacteria
- Formaldehyde Free
- Fireproof
- Soundproof
- Easy Installation
- Slip Resistant
- Waterproof
- Easy to Clean



Applications



Warranty

20 Year Residential Warranty and 7 Year Commercial Warranty.
 *Warranty is valid only when installed in accordance with BiForm's Flooring Installation Instructions.